

Data Sheet

Customer:

Product: Automotive Grade Alloy Chip Shunt Resistor — LRA..A Series

Size.: 0766

Issued Date: 13-Jun-23

Edition: REV.A1



VIKING TECH CORPORATION
光頡科技股份有限公司
No.70, Guangfu N. Rd., Hukou
Township, Hsinchu County
303, Taiwan (R.O.C)

TEL:886-3-5972931
FAX:886-3-5972935+886-3-5973494
E-mail:sales@viking.com.tw

VIKING TECH CORPORATION KAOHSIUNG BRANCH
光頡科技股份有限公司高雄分公司
No.248-3, Sin-Sheng Rd., Cian-Jhen Dist., Kaohsiung,
806, Taiwan

TEL:886-7-8217999
FAX:886-7-8228229
E-mail:sales@viking.com.tw


VIKING ELECTRONICS (WUXI) CO., LTD.
光頡電子(無錫)有限公司
No.22 Xixia Road, Machinery & Industry Park,
National Hi-Tech Industrial Development Zone
of Wuxi, Wuxi, Jiangsu Province, China
Zip Code:214028
TEL:86-510-85203339
FAX:86-510-85203667+86-510-85203977
E-mail:china@viking.com.tw

Produced by (QC)	Checked (QC)	Approved by (QC)	Prepared by (Sales)	Accepted by (Customer)
13-Jun-23	13-Jun-23	13-Jun-23	13-Jun-23	
<i>Kris Chen</i>	<i>Ben Chang</i>	<i>Ben Chang</i>		


Automotive Grade Alloy Chip Shunt Resistor

■ Applications

- Nudity E-beam welded metal strip resistors with 4-terminal,
Pure copper electrodes are the ideal solution for current sensing applications.
- Excellent reliability, stability, Anti-pulse capability, support $\pm 0.5\%$ tolerance of R value
- Special welding process, all-metal construction, supports low Resistance (down to 0.2m Ω), surface pickling passivation Treatment, vulcanization resistance, strong weather resistance
- Very low EMF (<1 μ V/C)
- Ultra-low parasitic inductance down to 1 nH, Fast response,
Can be used for high frequency AC current detection
- AEC-Q200 Reliability Testing passed
- RoHS compliant

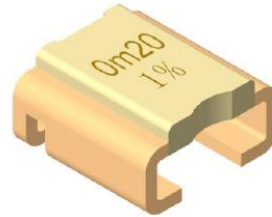


■ Dimensions

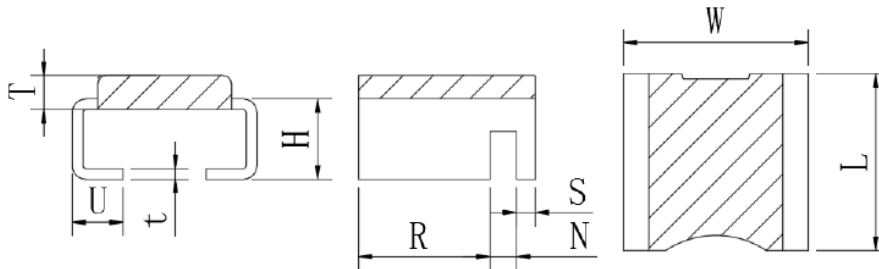

Type	Size (Inch)	Resistance (m Ω)	Material	T (mm)	t (mm)	L (mm)	W (mm)	R (mm)	N (mm)	S (mm)	U (mm)	H (mm)
LRA0766	2726	0.2	Manganin	1.3 \pm 0.1	0.6 \pm 0.1	6.6 \pm 0.35/-0.2	6.9 \pm 0.3	4.9 \pm 0.2	1 \pm 0.15	0.7 \pm 0.1	1.9 \pm 0.1	3 \pm 0.3
		0.3	Manganin	1.2 \pm 0.1	0.6 \pm 0.1							
		0.5	Manganin	0.68 \pm 0.1	0.68 \pm 0.1							
		0.7	Manganin	0.48 \pm 0.1	0.48 \pm 0.1							
		1	Manganin	0.35 \pm 0.1	0.4 \pm 0.1							
		2	FeCrAl	0.55 \pm 0.1	0.55 \pm 0.1							
		3	FeCrAl	0.36 \pm 0.1	0.4 \pm 0.1							
		4	FeCrAl	0.28 \pm 0.1	0.4 \pm 0.1							
		5	FeCrAl	0.28 \pm 0.1	0.4 \pm 0.1							
		2	Karma	0.52 \pm 0.1	0.52 \pm 0.1							
		3	Karma	0.35 \pm 0.1	0.4 \pm 0.1							
		4	Karma	0.26 \pm 0.1	0.4 \pm 0.1							

■ Note: FeCrAl material is magnetic and affects the inverter current, so please be careful in product selection.

■ Derating Curve

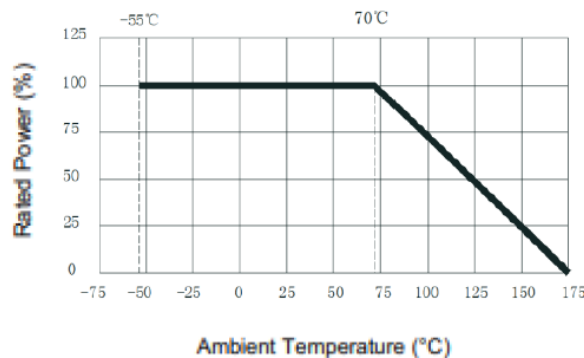

Automotive Grade Alloy Chip Shunt Resistor

Part Numbering


LRA	0766	F	T	C	R	R005	FI	A
Product Type	Dimensions (WxL)	Resistance Tolerance	Packaging Code	TCR (PPM/°C)	Power Rating	Resistance	Material & Shape Code	Function Code
	0766: 6.9x6.6	D: ±0.5% F: ±1% J: ±5%	T: Taping Reel	C : ±25 D : ±50 W : ±75	R: 3W H: 4W D: 5W I: 6W E: 7W 9: 9W 11: 11W 12: 12W	0M20: 0.2mΩ 0M30: 0.3mΩ 0M50: 0.5mΩ 0M70: 0.7mΩ R001: 1mΩ R002: 2mΩ R003: 3mΩ R004: 4mΩ R005: 5mΩ	FI: FeCrAl & Inward Fold KI: Karma & Inward Fold MI: Manganin & Inward Fold	A: Automotive Grade

Standard Electrical Specifications

Type	Power Rating	Material	Resistance Range(mΩ)			TCR (PPM/°C)
			±0.5%	±1%	±5%	
LRA0766	12W	Manganin	0.2			±75
	11W	Manganin	0.3			±75
	9W	Manganin	0.5			±75
	7W	Manganin	0.7			±75
	6W	Manganin	1			±50
	6W	FeCrAl	2			±25
	5W	FeCrAl	3			±25
	4W	FeCrAl	4			±25
	3W	FeCrAl	5			±25
	6W	Karma	2			±50
	5W	Karma	3			±50
	4W	Karma	4			±50

Operating Temperature: -55 ~ +175°C

Recommend Land Pattern

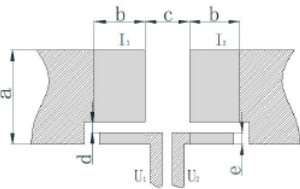

Type	a (mm)	b (mm)	c (mm)	d (mm)	e (mm)
LRA0766	7.3	2.9	2	0.8	0.9


Automotive Grade Alloy Chip Shunt Resistor

Environmental Characteristics

Item	Requirement	Test Method
Thermal shock	Within the specified value	IEC60115-1 4.8 Measured value -55°C and +130°C, reference value +20°C
Solderability	No visible damage, weldable area 95% minimum	IEC60115-1 4.17 245°C Tin slot, hold for 3 sec
Short time overload	No visible damage, ΔR±1.0% maximum	IEC60115-1 4.13 2.5 times rated voltage, 5 sec
Resistance to solder heat	No visible damage, ΔR±1.0% maximum	IEC60115-1 4.18 270°C Tin bath, hold for 10 sec
High temperature and humidity	No visible damage, ΔR±1.0% maximum	MIL-STD-202 Method 103 Temperature 85°C, humidity 85% of the conditions applied 10% of the rated power (current) or component limit current (whichever is less), for 1000 hours
High temperature storage	No visible damage, ΔR±1.0% maximum	IEC60115-1 4.25.3 1000 hrs @ 170°C, without load
Low temperature load	No visible damage, ΔR±1.0% maximum	IEC60115-1 4.36 -55°C, No load for one hour, rated voltage load for 45 min, no load for 15 min
Temperature cycling	No visible damage, ΔR±1.0% maximum	IEC60115-1 4.19 -55°C @ 30 min ~ room temperature @ <5 min ~ +155°C @ 30 min, 500 cycles
Load life	No visible damage, ΔR±1.0% maximum	IEC60115-1 4.25.1 1000 h @ 70±2°C, rated voltage, 90 min on, 30 min off


Packaging

Reel Specifications & Packaging Quantity

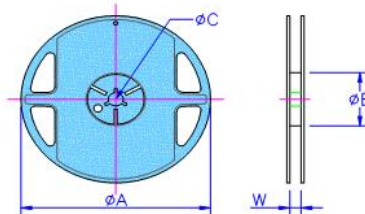

Type	Packaging Quantity	Tape Width	Reel Diameter	ΦA (mm)	ΦB (mm)	ΦC (mm)	W (mm)
LRA0766	Embossed 1K	16mm	13 inch	330±2	60±1	13.5±0.5	17±0.5

Embossed Plastic Tape Specifications

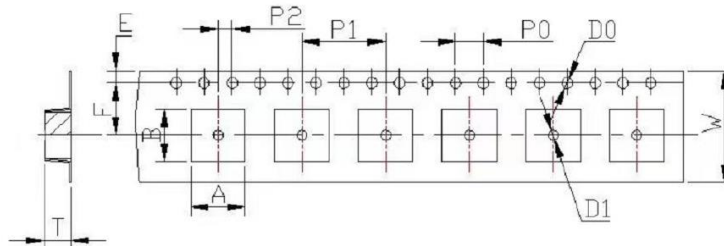

Type	A (mm)	B (mm)	W (mm)	E (mm)	F (mm)	P0 (mm)	P1 (mm)	P2 (mm)	ΦD0 (mm)	T (mm)
LRA0766	7.8	7.5	16	1.75	7.5	4	12	2	1.5	3.8